



# Semimural cerrada refrigerada grupo remoto

## Closed refrigeration low multideck remote group

Serie  
**SMDG**  
Series

### CARACTERÍSTICAS TÉCNICAS



Mueble semivertical de refrigeración cerrado con puertas correderas de cristal doble totalmente transparentes  
Visibilidad total del producto expuesto para la venta.  
Iluminación LED.

#### 4 niveles de exposición:

3 estantes  
Cuba

Estantes regulables inclinables.

Portaprecios 40 mm en estantes y cuba.

Flexibilidad de implantación: Un solo mueble para todos los regímenes de temperatura.

### TECHNICAL CHARACTERISTICS

Lowmultideck refrigeration case with double glazed and transparent slidding doors.

Toughened Low E glasses

Maximum product visibility.

LED lighting cold white color.

#### 4 exposure levels

3 shelves

Exposition deck

Tilttable adjustable shelves.

Prize-holder 40 mm. on shelves and exposition deck.

Implementation flexibility: A single piece of furniture for all temperature range.

**SML25DGM1**



**Laterales no incluidos en precio**  
Side panels not included in price  
(Pág 466)

**Disponible a partir de Junio 2020**  
Available June 2020

#### Dimensiones / Dimensions

##### Medidas / measure

904 x 1500 x \*\* L mm.

##### Longitud / length

[\*\*L] = 1250 / 1875 / 2500  
/ 3750 mm.

##### Estantes / shelves

300-350-400 mm.

##### Exposición / exposition deck

600 mm.

##### Espesor laterales /

end panel thickness

40 mm.

#### Modelos Disponibles

Available Models

Precio / Price (€)\*

SML12DGM1

SML18DGM1

SML25DGM1

SML37DGM1

SML12DGM2

SML18DGM2

SML25DGM2

SML37DGM2

\* Costados no incluidos en el precio

**Novedad: Opción para gas refrigerante CO<sub>2</sub>**

New: Optional refrigerant gas CO<sub>2</sub>

#### Clase climática 3 / Climatic class 3

25°C / 60% HR


#### Datos eléctricos / Electrical data

230V / 50-60Hz

#### Datos Merchandising [x metro]

Merchandising Data [x meter]

TDA/m	Área refrigerada Refrigerated area/m <sup>2</sup>	Volumen refrigerado/m <sup>3</sup> Refrigerated volume/m <sup>3</sup>
0,99	1,65	389

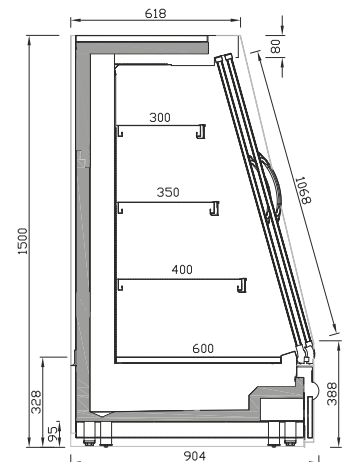

Sección comercial  
Commercial section

#### Refrigerante / Refrigerant

R-449A

Glycol, CO<sub>2</sub> [options]

#### Rango de Temperatura ISO23953

Temperature Range ISO23953

	Ta Producto Product Ta	Ta Aplicación Application Ta
<b>M1</b>	-1°C / +5°C	0°C / +2°C





# Semimural abierta refrigerada grupo remoto

## Open refrigeration low multideck remote group

Serie  
**SMPB**  
Series

### CARACTERÍSTICAS TÉCNICAS



Mueble semivertical de refrigeración abierto.  
Visibilidad total del producto expuesto para la venta.  
Iluminación LED.

#### 4 niveles de exposición:

3 estantes  
Cuba

Estantes regulables inclinables.

Portaprecios 40 mm en estantes y cuba.

Flexibilidad de implantación: Un solo mueble para todos los regímenes de temperatura.

### TECHNICAL CHARACTERISTICS

Lowmultideck refrigeration case.  
Maximum product visibility.  
LED lighting.

#### 4 exposure levels

3 shelves  
Exposition deck

Tilttable adjustable shelves.

Prize-holder 40 mm on shelves and exposition deck.

Implementation flexibility: A single piece of furniture for all temperature range.

**SML25PBM1**



**Laterales no incluidos en precio**  
Side panels not included in price  
(Pág 466)

**Disponible a partir de Junio 2020**  
Available June 2020

#### Dimensiones / Dimensions

**Medidas / measure**  
904 x 1500 x \*\* L mm.

**Longitud / length**  
[\*\*L] = 1250 / 1875 / 2500  
/ 3750 mm.

**Estantes / shelves**  
300-350-400 mm.

**Exposición / exposition deck**  
600 mm.

**Espesor laterales / end panel thickness**  
40 mm.

#### Modelos Disponibles

Available Models

Precio / Price (€)\*

SML12PBM1

SML18PBM1

SML25PBM1

SML37PBM1

SML12PBM2

SML18PBM2

SML25PBM2

SML37PBM2

\* Costados no incluidos en el precio


**Novedad: Opción para gas refrigerante CO<sub>2</sub>**  
New: Optional refrigerant gas CO<sub>2</sub>

**Clase climática 3 / Climatic class 3**  
25°C / 60% HR

**Datos eléctricos / Electrical data**  
230V / 50-60Hz

**Datos Merchandising [x metro]**  
Merchandising Data [x meter]

TDA/m	Área refrigerada Refrigerated area/m <sup>2</sup>	Volumen refrigerado/m <sup>3</sup> Refrigerated volume/m <sup>3</sup>
1,18	1,65	389

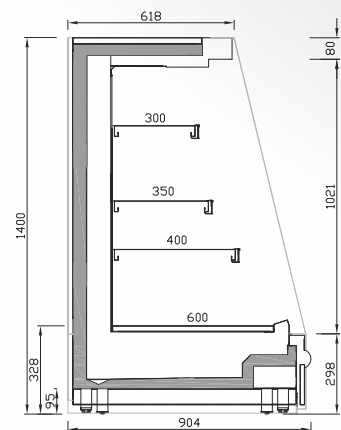

Sección comercial  
Commercial section

**Refrigerante / Refrigerant**  
R-449A  
Glycol, CO<sub>2</sub> (options)

**Rango de Temperatura ISO23953**  
Temperature Range ISO23953

	Ta Producto Product Ta	Ta Aplicación Application Ta
<b>M1</b>	-1°C / +5°C	0°C / +2°C
<b>M2</b>	-1°C / +7°C	+2°C / +4°C

MURALES  
MULTIDECKS

